


# Model Line-up:

126.8" WB

145.7" WB

164.6" WB

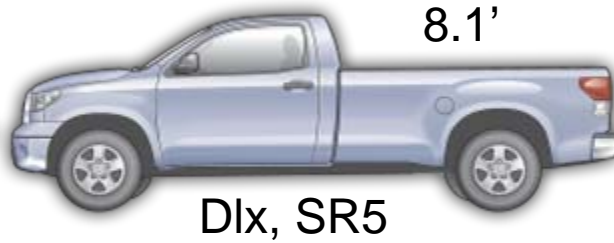

# Engines

- Dedicated High-Torque Truck Engines
- V8 Engines are ULEV II rated

Engine	Disp.	Power, HP	Torque, ft-lbs	Alternator
V6	4.0L	236 @5200	266 @4000	100A
V8	4.7L	271 @5400	313 @3400	130A
V8	5.7L	381 @5600	401 @3600	150A

# Transmissions and Axles

- Manual Shift Mode – Column or Console
- Lifetime Fluid Fill
- Standard Oil/ATF Coolers for Towing
- 6 Spd: Fluid Warmer

Forward Speeds	Control	Tow/Haul Mode	Axle Ratios		
			V6	4.7L V8	5.7L V8
5	ECTi	-	3.90	4.10	-
6	ECTi	✓	-	-	4.30

# Cargo Beds

CA

- Standard 6.5 ft – 78.7 in.
- Long Bed 8.1 ft – 97.6 in
- Short 5.5 ft – 66.7 in.



- Inside Bed Depth – 22.2 in.
- Width @ Wheelhouse – 50.0 in
- Width @ Tailgate – 66.4 in.



# GVWR, lbs.

		V6	4.7L V8		5.7L V8	
Cab	Bed	4x2 Only	4x2	4x4	4x2	4x4
Regular	6.5'	6200	6600	6800	6600	6800
	8.1'	6400	6800	7000	7000	7200
Double	6.5'	6400	6700	6900	6900	7100
	8.1'		6800	7000	7000	7200
CrewMax	5.5'		6800	7000	7000	7200

# Maximum Payload Capacity, lbs.

		V6	4.7L V8		5.7L V8	
Cab	Bed	4x2 Only	4x2	4x4	4x2	4x4
Regular	6.5'	1590	1825	1755	1765	1700
	8.1'	1685	1845	1780	2065	2000
Double	6.5'	1470	1610	1510	1755	1655
	8.1'		1515	1415	1655	1555
CrewMax	5.5'		1470	1370	1605	1515

# Maximum Towing Capacity, lbs.

		V6	4.7L V8		5.7L V8	
Cab	Bed	4x2 Only	4x2	4x4	4x2	4x4
Regular	6.5'	5100	8500	8200	10400	10100
	8.1'	5000	8400	8100	10800	10500
Double	6.5'	4800	8100	7800	10600	10300
	8.1'		8000	7700	10500	10200
CrewMax	5.5'		8000	7700	10400	10100